



B-LINE HARNES RANGE

Features and Specs

INCLUDES :

- 1 Point, 2 Point, 4 Point And
- Rescue
- Zinc Plated Fittings
- Polyester Customisable Webbing
- 140Kg User Rating

CONFORMITY:

EN361:2002
EN358:2018

ADDITIONAL FEATURES/ INFORMATION:

The B-LINE range of harnesses are an entry level harness with stand out features enabling full compliance without breaking the bank.

SUITABLE INDUSTRIES



SCAFFOLDING




OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK



TRANSPORTATION



STADIUM & EVENTS



FESTIVAL & STAGE



TV & FILM



RESCUE




ADDITIONAL FEATURES

B-LINE HARNESS RANGE




- 1 Blue Webbing as Standard**
customisable to your own
unique design



- 2 Contrast Sticking**
to help with inspection



- 3 Front D ring**
on 2pt and up



- 4 Polyester Webbing**
for wear resistance and
lifespan



- 5 Adjustable Chest Strap**
to enable a wide range of
adjustment



- 6 Adjustable Leg And
Torso Straps**
to allow adjustment
for a perfect fit

(Torso adjustment
optional)



ADDITIONAL FEATURES


B-LINE HARNESS RANGE



- ① **Rear D Ring as Standard**
for fall arrest



- ② **Adjustable Back Plate**
to adjust the D ring into the
correct position for your body



- ③ **Fall Indicators**
to show when the
harness has been in a
fall



- ④ **Comfort Bum Strap**
for all day comfort



- ⑤ **Webbing End Tabs**
on all adjustment
points on all models




- ⑥ **Rigid and Elastic Sliders**
allows you to lock the
adjustment and fold the
tail of the webbing neatly



ORDERING INFORMATION

PART NO	TORSO ADJUSTMENT	SIZE RANGE	CONNECTION POINTS	BUCKLES		RESCUE STRAP	STANDARDS
				PASS THROUGH	QUICK CONNECT		
BR-S1PH		S,ML,XL	1 Fall Arrest	●			EN 361
BR-ST1PH	●	S,ML,XL	1 Fall Arrest	●			EN 361
BR-S2PH		S,ML,XL	2 Fall Arrest	●			EN 361
BR-ST2PH	●	S,ML,XL	2 Fall Arrest	●			EN 361
BR-ST4PH	●	S,ML,XL	2 Fall Arrest 2 Positioning	●			EN 361 EN 358
BR-QCT4PH	●	S,ML,XL	2 Fall Arrest 2 Positioning		●		EN 361 EN 358
BR-R-ST2PH	●	S,ML,XL	2 Fall Arrest 1 Rescue		●	●	EN 361 EN 1497

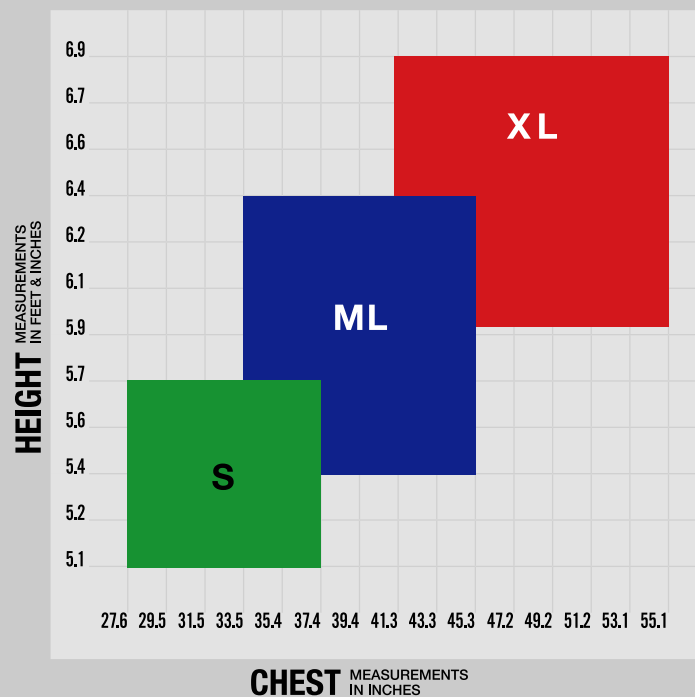



B-LINE LANYARD RANGE

Features and Specs

INCLUDES :

- Single Leg
- Twin Leg
- Fall Arrest or Restraint
- Polyester Customisable Webbing
- Rope Leg Options
- 140Kg User Rating

CONFORMITY:

EN354:2010
EN355:2002

ADDITIONAL FEATURES/ INFORMATION:

The B-LINE range of Lanyards offers a fully compliant entry level fall restraint and fall arrest lanyards, Twin leg is available to allow 100% tie off.

SUITABLE INDUSTRIES



SCAFFOLDING




OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK



TRANSPORTATION



STADIUM & EVENTS



FESTIVAL & STAGE



TV & FILM



RESCUE



ADDITIONAL FEATURES B-LINE RESTRAINT



- ① **Adjustable Webbing**
option for the full range of
length



- ② **Screw Gate Carabiner**
option



- ③ **Scaffold Hook**
option



- ④ **Kernmantle Rope**
adjustable length



- ⑤ **Fixed Length Kernmantle
Rope**
lanyards



ADDITIONAL FEATURES B-LINE FALL ARREST



- ① Shock Absorbing Pack
for fall arrest



- ② Single Leg
available in webbing, elasticated
webbing and kernmantle rope



- ③ Twin Leg
available in webbing, elasticated
webbing and kernmantle rope



- ④ Screw Gate Carabiner
option



- ⑤ Scaffold Hook
option



ORDERING INFORMATION

PART NO	TYPE		CONECTORS			NO OF LEGS		MATERIAL			LENGTH OPTIONS in (m)	STANDARDS
	Restraint	Fall Arrest	Scaff	Screw	None	Single	Twin	Web	Elastic Web	Rope		
BR-RRL-LL	●				●	●				●	1.0, 1.5, 1.8	EN 354
BR-RRL-CC	●			●		●				●	1.0, 1.5, 1.8	EN 354
BR-TRRL-CS	●		●				●			●	1.5	EN 354
BR-WRL-CC	●			●		●		●			1.0, 1.5, 1.8	EN 354
BR-ISFL-CC	●			●			●		●		1.8	EN 354
BR-ISFL-CS		●	●			●			●		1.8	EN 355
BR-SWFL-CC		●		●		●			●		1.8	EN 355
BR-SWFL-CS		●	●			●		●			1.8	EN 355
BR-SRFL-LL		●			●					●	1.5, 1.8	EN 355
BR-SRFL-CC		●		●		●				●	1.0, 1.5, 1.8	EN 355
BR-SRFL-CS		●	●			●				●	1.0, 1.5, 1.8	EN 355
BR-TRFL-CS		●	●				●			●	1.8	EN 355
BR-TEFL-CS		●	●				●			●	1.8	EN 355



B-LINE RTFA

Features and Specs

INCLUDES :

- Swivel Anchor Point
- 1.8m-15m
- Recessed Label Carry Handle
- 140Kg User Rating

CONFORMITY:

EN360:2002
VG11 RFU # 11.060.

CE 2233

ADDITIONAL FEATURES/ INFORMATION:

The B-LINE range of RTFA range from 1.8m-15m have a user rating of 140kg come in various lifeline, hook, and LE options.

SUITABLE INDUSTRIES



SCAFFOLDING




OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK



TRANSPORTATION



STADIUM & EVENTS



FESTIVAL & STAGE



TV & FILM



RESCUE



ADDITIONAL FEATURES

B-LINE RTFA 3



- ① **Swivel Anchor Point**
to stop cable twist and to help the RTFA locate and swivel



- ② **Nylon housing**



- ③ **Recessed Label**
for durability



- ④ **HMPE Webbing**
for wear resistance and weight saving



- ⑤ **External Shock Pack**
to absorb energy in a fall



- ⑥ **Aluminium Scaffold Hook**
option also available with snap hook



ADDITIONAL FEATURES

B-LINE RTFA 6-15



- 1 Swivel Anchor Point**
to stop cable twist and to help the RTFA locate and swivel



- 2 Carry Handle**
to help with transportation and hanging



- 3 GF Nylon housing**



- 4 Recessed Label**
for durability



- 5 Spring Bumper Cable Guide**
to help with retraction lock out



- 6 Rubber Hand Grip**
to protect hands from the cable



- 7 Swivel Snap Hook**
double action swivel




ADDITIONAL FEATURES

B-LINE RTFA 1.8-15 LE



- 1 Swivel Anchor Point**
to stop cable twist and to help the RTFA locate and swivel



- 2 Carry Handle**
to help with transportation and hanging



- 3 GF Nylon housing**



- 4 Recessed Label**
for durability





- 5 Spring Bumper Cable Guide**
to help with retraction lock out



- 6 External Shock Pack**
to absorb energy in a fall



- 7 Swivel Snap Hook**
double action swivel

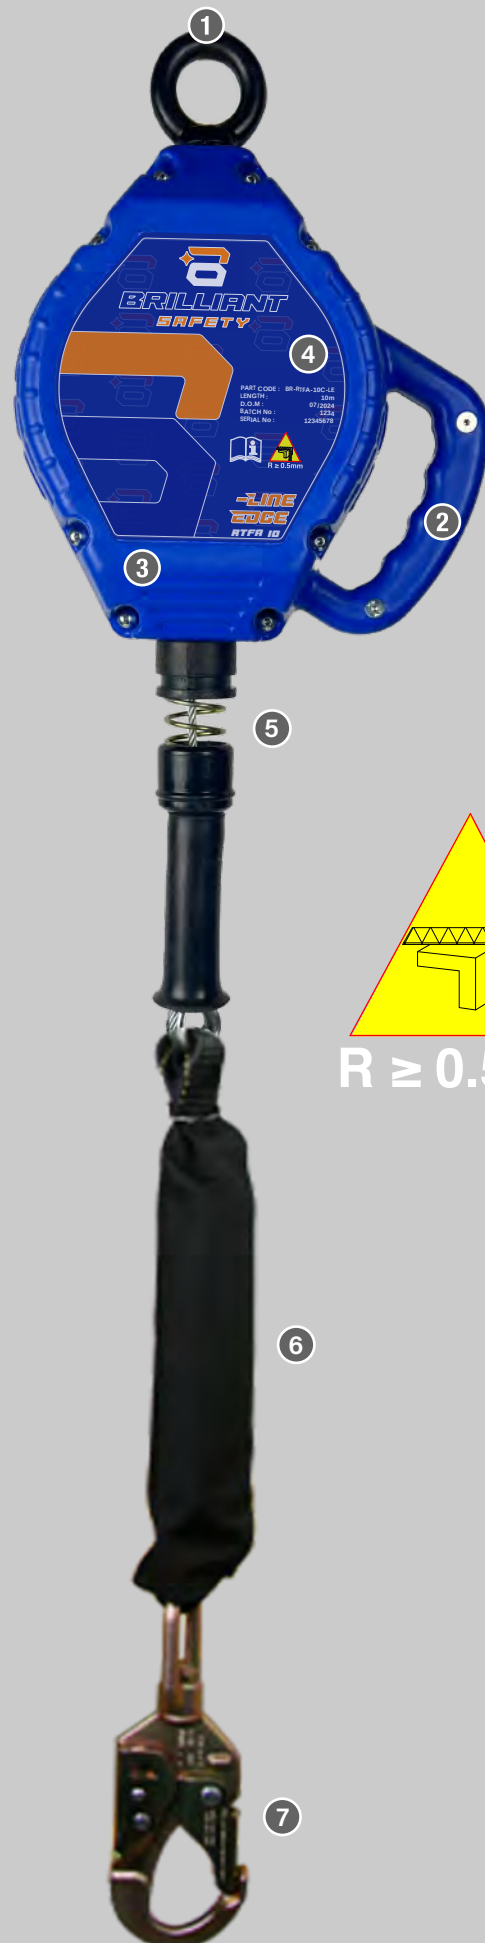

$R \geq 0.5\text{mm}$

ORDERING INFORMATION

PART NO	CONNECTOR	LE	LENGTH	MATERIALS	MAX USER WEIGHT (KG)
BR-RTFA-3WR	Aluminium Rebar Hook	No	3m	Webbing	140kg
BR-RTFA-6W	Swivel Snap Hook	No	6m	Webbing	
BR-RTFA-6C	Swivel Snap Hook	No	6m	Cable	
BR-RTFA-10C	Swivel Snap Hook	No	6m	Cable	
BR-RTFA-15C	Swivel Snap Hook	No	10m	Cable	

PART NO	CONNECTOR	LE	LENGTH	MATERIALS	MAX USER WEIGHT (KG)
BR-RTFA-1.8WR-LE	Alu Rebar Hook	Yes	1.8m	Webbing	140kg
BR-RTFA-1.8W-LE	Swivel Snap Hook	Yes	1.8m	Webbing	
BR-RTFA-3.5C-LE	Swivel Snap Hook	Yes	3.5m	Cable	
BR-RTFA-6C-LE	Swivel Snap Hook	Yes	6m	Cable	
BR-RTFA-10C-LE	Swivel Snap Hook	Yes	10m	Cable	
BR-RTFA-15C-LE	Swivel Snap Hook	Yes	15m	Cable	



Scaffolding



B **BUNGEE
TOGGLE TIE
TTX100**

Features and Specs

INCLUDES :

- Various colours
- Elasticated cord
- Weather resistant

CONFORMITY:
BS7955 COMPLIANT

SUITABLE INDUSTRIES



ORDERING INFORMATION

PART NO	COLOUR	MATERIAL	LENGTH	CORD EXTENSION	BREAKING LOAD	PACK QUANTITY
TTW-100	White/White	Elastic cord with polyester cover	310mm	40-45%	500N-600N	100
TTB-100	Blue/Black					
TTY-100	Yellow/Black					



OFTEN
PURCHASED WITH:



DEBRI NETTING

SIMILAR PRODUCTS:



ZT-48300B-100



NETTING TIE
SIZE: 4.8 X 300MM
ZT-48300B-100

Features and Specs

INCLUDES :

- Made from Nylon 66
- UV protected for both indoor and outdoor use
- Highly resistant against: lubricants, oil, grease, hydro carbons, paints, fats and petrol.
- Self-locking, high-strength

CONFORMITY:

EN IEC 62275:2019

SUITABLE INDUSTRIES



SCAFFOLDING



OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



STADIUM & EVENTS



FESTIVAL & STAGE



BRICKWORK



TRANSPORTATION



TV & FILM



PART NO	COLOUR	MATERIAL	DIMENSIONS	WORKING TEMP	MIN BREAKING LOAD	PACK QUANTITY
ZT-48300B-100	Black	Nylon 66	4.8mm x 300mm	-40-85°C	22.7kg	100



DEBRIS NETTING

Features and Specs

INCLUDES :

- Our debris netting comes in multiple colours and an option of 2m and 3m sizes.
- Debris netting is eyeleted every 5cm (approx) to make this easier to apply.
- Comes in Green, Blue, Red, Yellow, Black, orange and White.
- The debris netting is packed in a single polybag.

SUITABLE INDUSTRIES



SCAFFOLDING



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



STADIUM & EVENTS



FESTIVAL & STAGE



BRICKWORK



TRANSPORTATION



TV & FILM



PART NO	COLOUR	MATERIAL	DIMENSIONS	WORKING TEMP	EYELETS	AIR PERMABILITY	PACKAGING	PALLET QUANTITY
DEBRIS NETTING	VARIOUS	HDPE	2m & 3m x 50m	-70-100°C	FABRIC EVERY 5mm	> 1700	POLY BAG	SIZE DEPENDENT



61
**BRILLIANT
LATEX GRIP GLOVE
GL-BLG**

Features and Specs

INCLUDES :

- Latex Grip
- Tough-Knit Liner
- High Dexterity
- Superior Specification Quality

CONFORMITY:

EN388:2016
RATING: 2242X

EN 388:2016



2242X

**ADDITIONAL FEATURES/
INFORMATION:**

Colour coded cuffs to help with size identification.
Features the strongest tear resistance available from **BRILLIANT SAFETY**.

HAND SIZE DEFINED IN EN 420:2003	GLOVE SIZE
8	8/M
9	9/L
10	10/XL

SUITABLE INDUSTRIES



SCAFFOLDING



OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK




TRANSPORTATION



ORDERING INFORMATION


PART NO	SIZE	RATING	MATERIAL		PACK QTY (PAIRS)	CASE QTY (PAIRS)
			Palm	Liner		
GL-BLG-8M	8 Medium/Green	2242X	Latex	5 Yarn Mix	12	240
GL-BLG-9L	9 Large/Red	2242X	Latex	5 Yarn Mix	12	240
GL-BLG-10XL	10 XLarge/blue	2242X	Latex	5 Yarn Mix	12	240



- ① **5-Yarn Grey Liner**
for reduced rigidity, greater flexibility and enhanced protective properties.



- ② **Product Rating, Code & Size**
clearly displayed.



- ③ **Crinkle Latex Palm**
for robust grip composition and greater tactile sensitivity.



- ④ **Colour Coded Hemmed Wrist-ends**
to ease size selection, prevent fraying and maintain close-fit.





ULTRA GRIP NITRILE GLOVE GL-UGN

Features and Specs

INCLUDES :

- Nitrile Grip
- Tough, Close-Knit Liner
- High Dexterity
- Superior Specification Quality

CONFORMITY:

EN388:2016

RATING: 4121X

EN 388:2016



4121X

ADDITIONAL FEATURES/ INFORMATION:

Colour coded cuffs to help with size identification.

Designed to provide the highest abrasion resistance possible in a **BRILLIANT SAFETY** glove.

HAND SIZE DEFINED IN EN 420:2003	GLOVE SIZE
8	8/M
9	9/L
10	10/XL

SUITABLE INDUSTRIES



SCAFFOLDING



OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK




TRANSPORTATION



ORDERING INFORMATION


PART NO	SIZE	RATING	MATERIAL		PACK QTY (PAIRS)	CASE QTY (PAIRS)
			Palm	Liner		
GL-UGM-8M	8 Medium/Green	4121X	Nitrile	Polyester	12	240
GL-UGM-9L	9 Large/Red	4121X	Nitrile	Polyester	12	240
GL-UGM-10XL	10 XLarge/blue	4121X	Nitrile	Polyester	12	240




- ① **Woven Polyester Liner**
for reduced rigidity, greater flexibility and enhanced protective properties.



- ② **Product Rating, Code & Size**
clearly displayed.



- ③ **Smooth Nitrile Palm**
for closer grip and increased resistance to puncturing and tearing.



- ④ **Colour Coded Hemmed Wrist-ends**
to ease size selection, prevent fraying and maintain close-fit.





**LATEX PALM
GLOVE
GL-LP**

Features and Specs

INCLUDES:

- Latex Grip
- Tough, Mixed Fibre Liner
- High Dexterity
- Superior Specification Quality

CONFORMITY:

EN388:2016

RATING: 3121X

EN 388:2016



3121X

ADDITIONAL FEATURES/ INFORMATION:

Colour coded cuffs to help with size identification.

One of the most popular
BRILLIANT SAFETY glove.

HAND SIZE DEFINED IN EN 420:2003	GLOVE SIZE
8	8/M
9	9/L
10	10/XL

SUITABLE INDUSTRIES



SCAFFOLDING




OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK




TRANSPORTATION



ORDERING INFORMATION


PART NO	SIZE	RATING	MATERIAL		PACK QTY (PAIRS)	CASE QTY (PAIRS)
			Palm	Liner		
GL-LP-8M	8 Medium/Green	2131X	Latex	Mixed Fibre	12	240
GL-LP-9L	9 Large/Red	2131X	Latex	Mixed Fibre	12	240
GL-LP-10XL	10 XLarge/blue	2131X	Latex	Mixed Fibre	12	240



- ① **Tough Mixed Fibre Liner**
for reduced rigidity, greater
flexibility and enhanced
protective properties.



- ② **Product Rating,
Code & Size**
clearly displayed.



- ③ **Textured Nitrile Palm**
for robust grip composition
and greater tactile
sensitivity.



- ④ **Colour Coded Hemmed Wrist-ends**
to ease size selection, prevent fraying
and maintain close-fit.





6

PU PALM
GLOVE
GL-PUP

Features and Specs

INCLUDES :

- Polyurethane Grip
- Tough, Polyester Liner
- High Dexterity
- Superior Specification Quality

CONFORMITY:

EN388:2016

RATING: 3121X

EN 388:2016



3121X

ADDITIONAL FEATURES/ INFORMATION:

Colour coded cuffs to help with size identification.

The general safety glove from **BRILLIANT SAFETY**.

HAND SIZE DEFINED IN EN 420:2003	GLOVE SIZE
8	8/M
9	9/L
10	10/XL

SUITABLE INDUSTRIES



SCAFFOLDING




OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK




TRANSPORTATION



ORDERING INFORMATION


PART NO	SIZE	RATING	MATERIAL		PACK QTY (PAIRS)	CASE QTY (PAIRS)
			Palm	Liner		
GL-PUP-8M	8 Medium/Green	3121X	Polyurethane	Polyester	12	240
GL-PUP-9L	9 Large/Red	3121X	Polyurethane	Polyester	12	240
GL-PUP-10XL	10 XLarge/blue	3121X	Polyurethane	Polyester	12	240



- ① **Tough Polyester Liner**
for reduced rigidity, greater
flexibility and enhanced
protective properties.



- ② **Product Rating,
Code & Size**
clearly displayed.



- ③ **Polyurethane Grip Palm**
for robust grip composition
and greater tactile
sensitivity.



- ④ **Colour Coded Hemmed Wrist-ends**
to ease size selection, prevent fraying
and maintain close-fit.





**ANTI IMPACT
GLOVE
GL-AI**

Features and Specs

INCLUDES :

- Nitrile Sandy Textured Grip
- Tough, Polyester Liner
- High Dexterity
- Superior Specification Quality
- Thumb Crotch Reinforcement
- Touch Screen Friendly
- Velcro Cuff
- Padded Palm
- ID Tag

CONFORMITY:

EN388:2016

RATING: 4121XP

EN 388:2016



4121XP

ADDITIONAL FEATURES/ INFORMATION:

Colour coded cuffs to help with size identification.

The most feature packed glove from **BRILLIANT SAFETY**.

HAND SIZE DEFINED IN EN 420:2003	GLOVE SIZE
8	8/M
9	9/L
10	10/XL

SUITABLE INDUSTRIES



SCAFFOLDING




OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK




TRANSPORTATION



ORDERING INFORMATION


PART NO	SIZE	RATING	MATERIAL		PACK QTY (PAIRS)	CASE QTY (PAIRS)
			Palm	Liner		
GL-AI-8M	8 Medium/Green	4121XP	Nitrile	Polyester	1	60
GL-AI-9L	9 Large/Red	4121XP	Nitrile	Polyester	1	60
GL-AI-10XL	10 XLarge/blue	4121XP	Nitrile	Polyester	1	60



- ① **Tough Mixed Fibre Liner**
for reduced rigidity, greater flexibility and enhanced protective properties.




- ② **Kevlar Thumb Crotch**
for extra reinforcement and better durability.



- ③ **Textured Nitrile Palm**
for robust grip composition and greater tactile sensitivity.



- ④ **Velcro Cuff**
to maintain a close-fit.



- ⑤ **TPR Impact Pads**
for impact protection.



- ⑥ **Touch Screen Friendly**
for when you need technology





EYE-LINE SG-AS

Features and Specs

INCLUDES :

- Anti Scratch Lens Coating
- 99.9% UV protection
- Polycarbonate Lens Provides Impact Resistance
- Clear Or Tinted Lens

CONFORMITY:

EN166:2001

ADDITIONAL FEATURES/ INFORMATION:

Eye-Line safety glasses offer a low profile design which allows for a perfect fit for both men and women. They offer a durable lens coated for scratch resistance and 99.9% UV protection.

Polycarbonate lens provides impact resistance. Available in clear and tinted options.

SUITABLE INDUSTRIES



SCAFFOLDING




OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK



TRANSPORTATION



ORDERING INFORMATION

PART NO	STANDARD	LANYARD	LENS		PACK QTY (PAIRS)	CASE QTY (PAIRS)
			Coating	Colour		
SG-ASC	EN166:2001	No	Anti Scratch	Clear	12	300
SG-AST	EN166:2001	No	Anti Scratch	Tinted	12	300




- ① Anti Scratch Coating**
for extra clarity and
better durability.



- ② Low Profile
Design**
allows for a
perfect fit



- ③ Polycarbonate**
lens provides impact
resistance

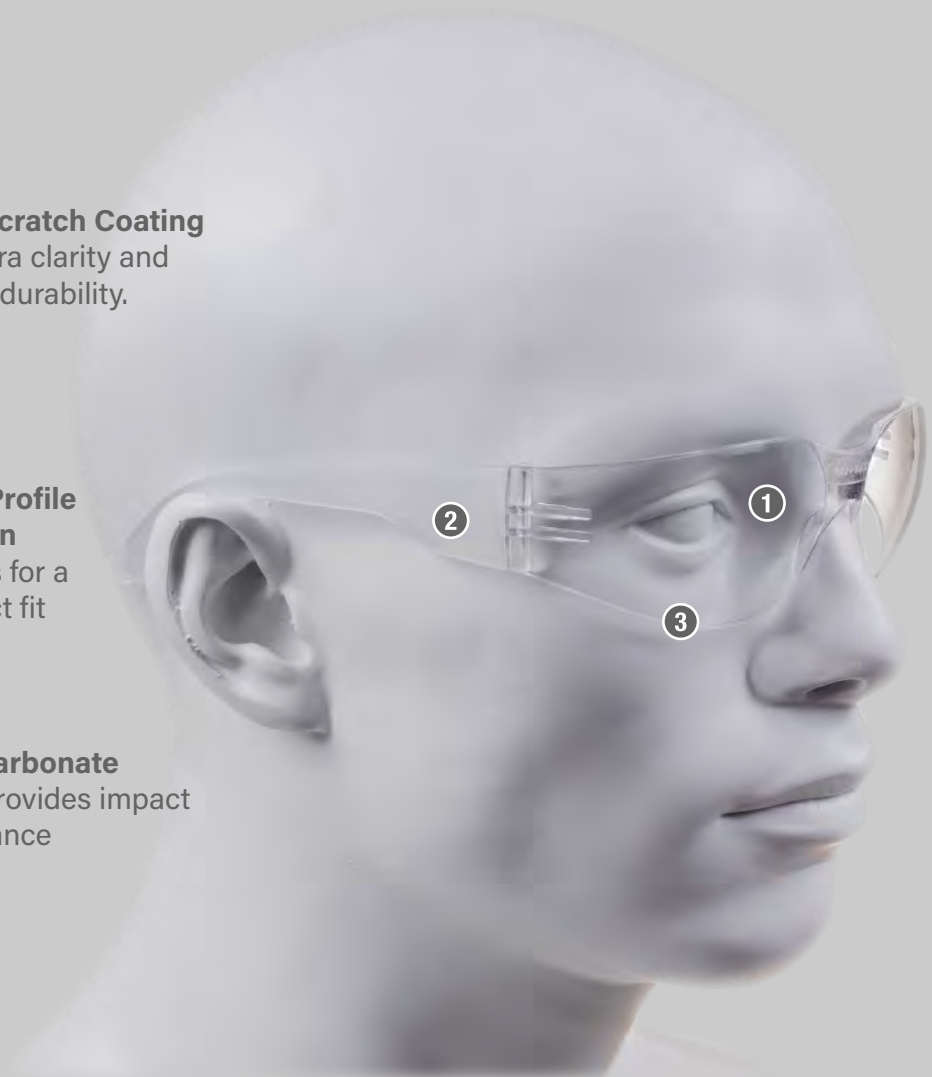



EYE-LINE

SG-ASCWL SG-ASTWL

Features and Specs

INCLUDES :

- Anti Scratch Lens Coating
- 99.9% UV protection
- Polycarbonate Lens Provides Impact Resistance
- Neck Lanyard
- Rubber Nosepiece
- Clear Or Tinted Lens

CONFORMITY:

EN166:2001

ADDITIONAL FEATURES/ INFORMATION:

Eye-Line lanyard keeps glasses always within reach. the safety glasses offer a low profile design which allows for a perfect fit. Rubber-tipped temples help relieve pressure and a soft rubber nosepiece offer all-day comfort.

A durable lens coated for scratch resistance and 99.9% UV protection.

Polycarbonate lens provides impact resistance. Available in clear and tinted options.

SUITABLE INDUSTRIES



SCAFFOLDING




OIL & GAS



CONSTRUCTION



ROOFING



DEMOLITION



MAINTENANCE



BRICKWORK



TRANSPORTATION

